


Road and urban luminaires



BILLUND



Type	Billund	Optic	Wide beam
Light source	LED module	Optical cover	Glass, flat
Driver	Driver included	Body material	Housing: high-pressure, die-cast aluminium
Mains voltage index	230 – 240 V / 50 – 60 Hz	Installation	Side-entry mounting: lateral entry Ø60mm Recommended mounting height: 3-5 m
Power	40 – 60 W depending on type	Color	Grey RAL 7024
Luminaire efficacy	>0,96	Impact resistance	IK09
Luminous flux	4000 – 7750 lm depending on type	Ingress protection	IP66
Colour rendering index	75 - 80	Electrical safety	Class I
Light color	Neutral white - 4000 K	Application	• Parks • Squares • Boulevards • Embankments • Recreation areas
Maintenance of lumen output - L80F10	100000 hours		
Maintenance	Opening with screw		

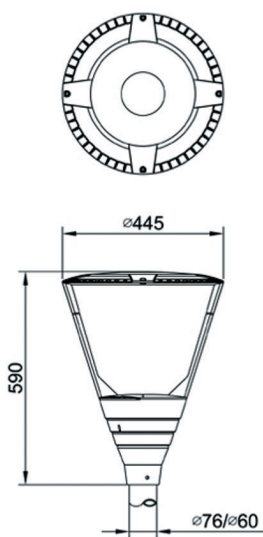

Product family range

Code	Type	Power consumption	Initial luminous flux lm	Color temperature	Weght kg	Ingress protection	Impact resistance
600151532103	DPS355 LED042 40W PC I 740 100	40	4200	4000	13	IP 66	IK 08
600151532104	DPS355 LED063 60W PC I 740 100	60	6300	4000	13	IP 66	IK 10

