

Road and urban luminaires




ROUND URBAN LIGHT



Type	Round Urban Light
Light source	LED module
Driver	Driver Philips included
Mains voltage index	230 – 240 V / 50 – 60 Hz
Power	40 – 60 W depending on type
Luminaire efficacy	>0,96
Luminous flux	4000 – 7750 lm depending on type
Colour rendering index	80
Light color	Neutral white - 4000 K
Maintenance of lumen output - L80F10	100000 hours
Maintenance	Opening with screw

Optic	Wide beam
Optical cover	Glass, flat
Body material	Housing: high-pressure, die-cast aluminium
Installation	Side-entry mounting: lateral entry Ø60mm Recommended mounting height: 3-5 m
Color	Grey RAL 7024
Impact resistance	IK09
Ingress protection	IP66
Electrical safety	Class I
Application	• Parks • Squares • Boulevards • Embankments • Recreation areas

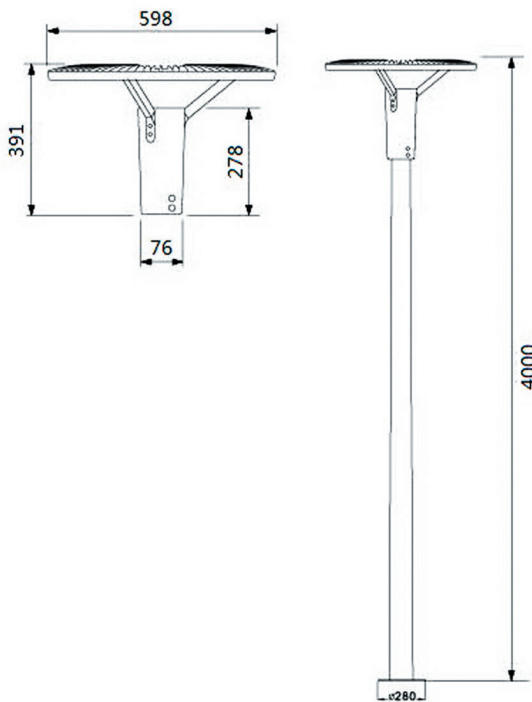

Product family range

Code	Type	Power consumption	Initial luminous flux lm	Color temperature	Weght kg	Ingress protection	Impact resistance
600151532101	DPS255 LED042 40W PC I 740 100	40	4200	4000	13	IP 66	IK 08
600151532102	DPS255 LED063 60W PC I 740 100	60	6300	4000	13	IP 66	IK 10

